


SIDE MOUNTED MOWERS

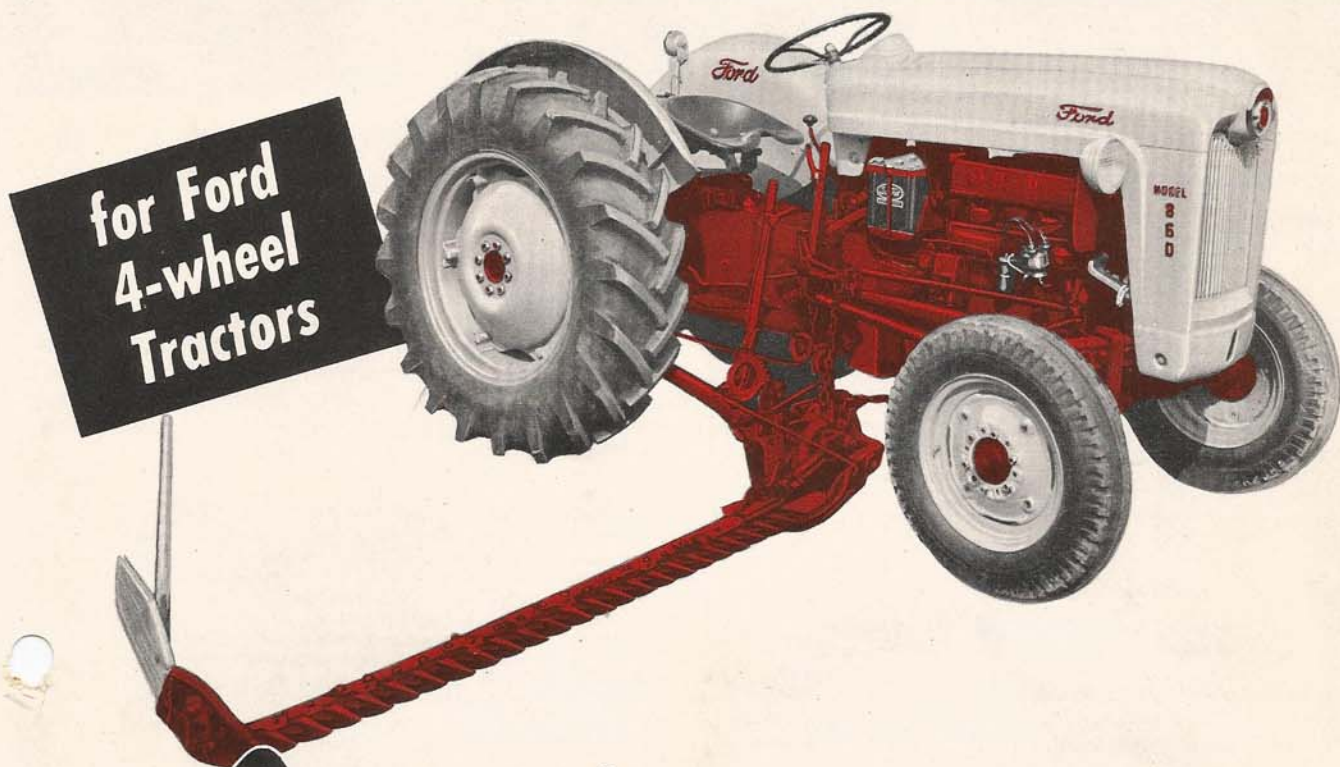

for *fast, clean mowing*
on any kind of job

- HAY CROPS
- ROADSIDES
- CLIPPING PASTURES
- RIGHT OF WAYS

You can depend on these mowers for top performance in any kind of mowing job. They're fast and efficient, and have the necessary strength and ruggedness to keep going when the mowing gets tough. Whether it's hay crops, weeds or small brush, whatever you have to mow, you'll be pleased with the good performance of a Dearborn Side Mounted Mower on a Ford Tractor.


Smooth easy running results from sturdy construction, double V-belt drive, counter balanced crankshaft and tapered roller main and pitman crank bearings. The drag bar is supported in two heavy rubber bushings.

Other features which help you do a better job of mowing are explained on the back of this sheet.



LIFTS FOR MOWING CURBS, CLIPPING PASTURES, LEAVING TALL STUBBLE

The curb lift permits you to raise the inner shoe 7½ inches (Model 14-77), 9 inches (Model 14-68). You can still cut at any angle from below horizontal to almost vertical. A convenient tilt lever permits tilting cutter bar up or down through a 3-inch range at guard tips.

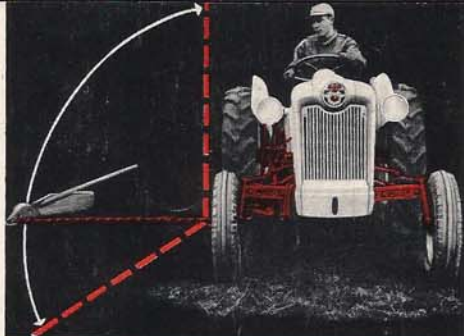

CUTTER BAR OPERATES FROM ALMOST VERTICAL TO 45° BELOW HORIZONTAL

With this wide range of cutter bar adjustment it's easy to mow banks, slopes and ditches as well as level fields. The cutter bar can be quickly and conveniently raised or lowered to any position in this operating range by a simple movement of the Hydraulic Touch Control lever.



CUTTER BAR IS EASILY LIFTED OVER OBSTRUCTIONS WITH HYDRAULIC TOUCH CONTROL

When you come to a stone, pole or other obstruction, just lift the cutter bar over and lower it on the other side. A safety engine cut-off automatically stops the tractor by cutting the ignition should the cutter bar accidentally strike the obstruction and swing back.

SPECIFICATIONS

Dearborn Side Mounted Mowers

- Model 14-77 (600 and 800 Ford Tractors)
- Model 14-68 (NAA and 8N Ford Tractors)
- Attaching Kits — 14-69 for NAA; 14-70 for 8N
- Cutter Bars — Model 14-61 (5 ft.); Model 14-64 (6 ft.)

CUTTER BAR — Sold separately, 5' or 6' optional, under-serrated knife sections and heavy-duty rock guards stand-

ard. **DRIVE** — Heavy double V-belts, adjustable tension. **BEARINGS** — Tapered roller main and pitman crank bearings, adjustable and oil sealed. **CRANKSHAFT** — Hardened and ground chrome steel. **PITMAN** — Self aligning, malleable iron with detachable hardened forged steel ball caps, pivots on large bronze bearings. **FRAME** — Fabricated steel, attaches to transmission and rear axle mounting pads, drag bar bracket mounted in rubber. **LUBRICATION** — Pressure fittings throughout. **WEIGHT** (less cutter bar) — Approx. 442 lbs. (14-77), Approx. 360 lbs. (14-68). **SHIPPING WEIGHT OF CUTTER BAR** — Approx. 94 lbs. (14-64), Approx. 80 lbs. (14-61).

Design, Materials and/or Specifications are Subject to Change Without Notice and Without Liability Therefor.

Ford Farming

GETS MORE DONE
...AT LOWER COST